



## Helical extractors



AA10G

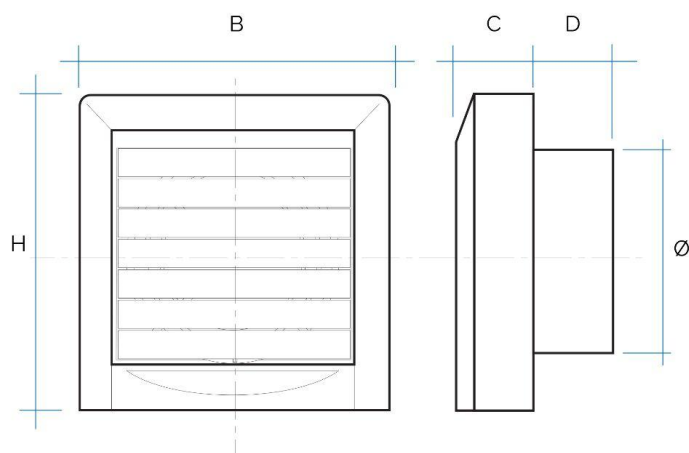

Flow rate curve

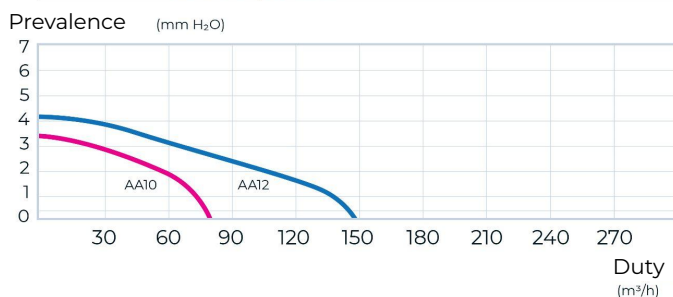

The opening and closing of the automatic shutter occurs after approximately 40 seconds after aspirator turning on or shutting down.



Insulation class II

**IPX4**



230 V/  
50HZ

Item	Colour	BxH mm	Ø Hole mm	Air flow m <sup>3</sup> /h	P watt	Noise dB	C mm	D mm	Ø mm
<b>AA10G</b>	white	155x165	100/4"	80	15	33	46	45	98
<b>AA12G</b>	white	180x200	120/5"	150	20	36	40	66	115
<b>AA15G</b>	white	200x230	150/6"	230	29	50	55	60	148

**Description:** Wall-mounted helical extractor with automatic shutter

**Features:** The helical extractor is complete with a shutter to prevent external air from entering the room. The helical aspirator is a simple and versatile solution to solve the problem of air exchange for a certain type of domestic environment, such as service bathrooms or laundry rooms. Helical extractors are suitable for direct wall outlet or for installations where it is not necessary to flow the air on very long distances through the ducts.

